
## SupIR 100mm f/1.4, Fixed Focus 65148





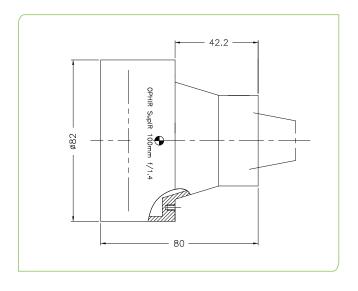

HFOV	320x240	384x288	640x480	1024x768
17µ	3.1°	3.7°	6.2°	9.8°
12µ	2.2°	2.6°	4.4°	7.0°

Property			Value	Value			
Optical							
Focal Length			100mm	100mm			
F#			1.4	1.4			
Average transmission (8-12µm)			88% (HC)	88% (HC)			
Back Focal Length			30.3mm ir	30.3mm in air			
Mechanical							
Focus Mechanism			Fixed focu	Fixed focus			
Depth of Field			470m to ir	470m to infinity			
Focus Range			5.5m to in	5.5m to infinity			
Weight			260gr	260gr			
Max. Dimensions			Ø82mm x	Ø82mm x 80mm			
Environmental							
Operation Temperature			-30°C to +	-30°C to +85°C			
Storage Temperature			-40°C to +	-40°C to +85°C			
Sealing			IP 67 front	IP 67 front element only			
Configurations	Weight (gr)	Dimensions	BWD**	Thread	Coating		
65148-02	260	Ø82mm x 80mm	18.95	4x #4-40 UNC	HC		

<sup>\*\*</sup> The BWD value is calculated for a unique detector setup with varying sealing windows in terms of thickness and material. For more details, contact your local sales representative.



<sup>\*</sup> The ICD drawing provided here is primarily a representation and may not accurately reflect the product's actual dimensions and specifications. For precise integration specifications contact your local sales representative.