1.1.2.2 High Sensitivity Thermal Sensors

2mW to 12W

Features

- Very low noise and drift to measure very low powers and energies
- Broadband and P absorbers for CW and short pulses
- Up to 12W
- Spectrally flat

12A / 12A-P

Model	12A	12A-P	
Use	**General purpose**	**Short pulses**	
Absorber Type	Broadband	P type	
Spectral Range µm	0.19 - 20	0.15 - 8	
Aperture mm	Ø16mm	Ø16mm	
Power Mode			
Power Range	2mW - 12W	2mW - 12W	
Power Scales	12W to 20mW	12W to 20mW	
Power Noise Level	50µW	50µW	
Thermal Drift (30min) [a]	40 - 150µW	40 - 150µW	
Maximum Average Power Density kW/cm²	25	0.05	
Response Time with Meter (0-95%) typ. s	3	3.5	
Calibration Uncertainty ±%	1.9	1.9	
Power Accuracy ±%	3	3	
Linearity with Power ±%	1.5	1.5	
Energy Mode			
Energy Range	1mJ - 30J	1mJ - 30J	
Energy Scales [b]	30J to 30mJ	30J to 30mJ	
Minimum Energy mJ	1	1	
Maximum Energy Density J/cm² [c]			
Pulse rate:		Single	10 - 30Hz
<100ns	0.3	10	1
0.5ms	5	10	1
2ms	10	10	1
10ms	30	10	1
Cooling	convection	convection	
Fiber Adapters Available (see page 120)	ST, FC, SMA, SC	ST, FC, SMA, SC	
Weight kg	0.35	0.35	
Compliance	CE, UKCA, China RoHS	CE, UKCA, China RoHS	
Version	V1		
Part number	**7Z02638**	**7Z02624**	

Note: (a) Depending on room airflow and temperature variations

Note: (b) For the 30mJ energy scale measurements it is recommended to use the screw on barrel supplied with the sensor to protect from direct air flow

Note: (c) For P type and shorter wavelengths derate maximum energy density as follows:

Wavelength	Derate to value
1064nm	Not derated
532nm	Not derated
355nm	40% of stated value
266nm	10% of stated value
193nm	10% of stated value
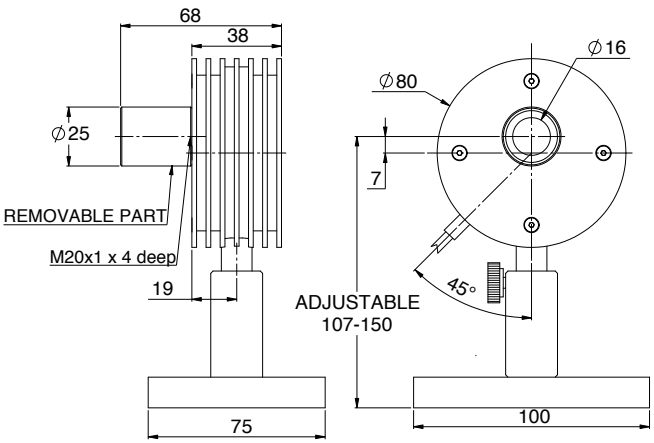
12A / 12A-P