## SupIR 50/150mm f/4.0, Motorized Focus 65103\*



## WFOV(50mm)

HFOV	640x512	1280x1024
15µ	11.0°	
10µ	7.3°	14.6°


## NFOV(150mm)

HFOV	640x512	1280x1024
15µ	3.6°	
10µ	2.4°	4.8°

Property	Value		
Optical	WFOV	NFOV	
Focal Length	50mm	150mm	
F/#	4		
Cold Stop to FPA Distance	19.4mm	19.4mm	
Average Transmission (3.4-5µm)	97% (HE)	97% (HE)	
Back Focal Length	26.28mm in air		
Mechanical			
Focus Mechanism	Motorized		
Focus Range	5m to infinity	20m to infinity	
Focus Switch Time	6 sec.		
FOV Mechanism	Motorized	Motorized	
FOV Switch Time	1 sec.	1 sec.	
Weight	700gr		
Max. Dimensions	Length 113mm, Width	Length 113mm, Width 101mm, Height 98mm	



<sup>\*</sup> Requires export license

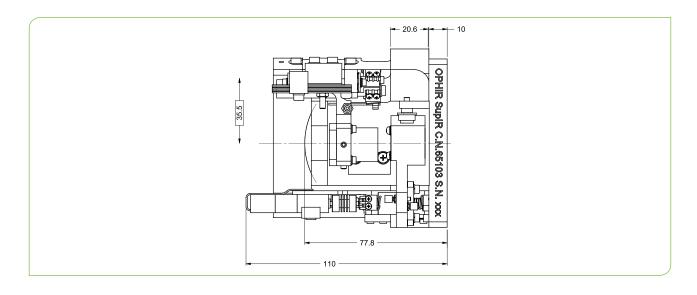

Property	Value
Electrical	
Focus Motor	3.5-6VDC, Encoder:5-15VDC
FOV Motor	3.5-6VDC, Encoder:5-15VDC
Environmental	
Operating Temperature	-32°C to +55°C
Storage Temperature	-40°C to +70°C
Sealing	Consult factory
Configurations	
65103	High Efficiency



<sup>\*</sup> NOTE: The ICD drawing provided here is primarily a representation and may not accurately reflect the product's actual dimensions and specifications. For precise integration specifications contact your local sales representative.