
SupIR 13.6mm f/1.0, Fixed Athermalized 680412

NEW



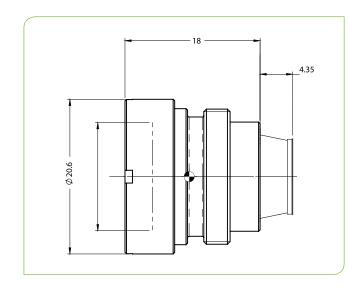

HFOV	320x240	384x288	640x480
17µ	22.8°	27.3°	
12µ	16.2°	19.3°	32.0°
10µ	13.5°	16.2°	26.8°

Property			Value	Value			
Optical							
Focal Length			13.6mm	13.6mm			
F#			1.0	1.0			
Average transmission (8-12µm)			91% (HD)	91% (HD) / 88% (LRHC)			
Back Focal Length			4.8mm in	4.8mm in air			
Mechanical							
Focus Mechanism			Fixed	Fixed			
Depth of Field			9m to infin	9m to infinity			
Focus Range			1m to infir	1m to infinity			
Weight			12.7gr	12.7gr			
Max. Dimensions			Ø20.6mm	Ø20.6mm x 18mm			
Environmental							
Operation Temperature			-40°C to +	-40°C to +80°C			
Storage Temperature			-50°C to +	-50°C to +85°C			
Sealing		IP 67 front	IP 67 front element only				
Configurations	Weight (gr)	Dimensions	BWD**	Thread	Coating		
680412-003	— 12.7	Ø20.6mm x 18mm	4.35	M18x0.5	HD		
680412-004			4.00		LRHC***		

^{*} The ICD drawing provided here is primarily a representation and may not accurately reflect the product's actual dimensions and specifications. For precise integration specifications contact your local sales representative.

^{***} For detailed LRHC coating specifications see page 13



^{**} The BWD value is calculated for a unique detector setup with varying sealing windows in terms of thickness and material. For more details, contact your local sales representative.